

BUBBLE WALL INSTRUCTION

57391 171 – 9BW120A

Securing the panel :

You can fix this item to a wall: place your hardware through the white plastic outer posts, depending on how you want to install the item, after making sure the panel is straight and in the right place before securing it. Use fasteners that fit your walls. If unsure, please contact a professional.

Assembly :

Each Bubble Wall is supplied assembled except for one small part which needs to be attached by the customer on the top of the bubble wall. After unpacking the contents of the box, follow these steps :


- At the top of the Bubble Wall, attach the white plastic part using the fixings and Allen Key provided (see photo below).



- Slowly add the water ((distilled or classic water can be used. If you used distilled water, it will be clean longer) in the top of the panel, fill to the bottom of the white band with the arrow mark.

- Place the black foam particle filter inside this white plastic part (see photo above).

Using the panel :

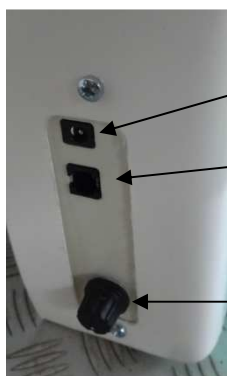

Power supply

Connector for wired controller

Bubble controller

Plug this unit to the mains socket.

The bubble wall switches on and colours appear automatically.

A button allows control bubbles' intensity.

After turning the power off to this unit, please allow 40 seconds before turning it back on again to ensure all micro controllers are fully reset. (this will prolong the life of this unit & ensure its proper performance).